BENITO™

FP8003**
Ceiling Fan

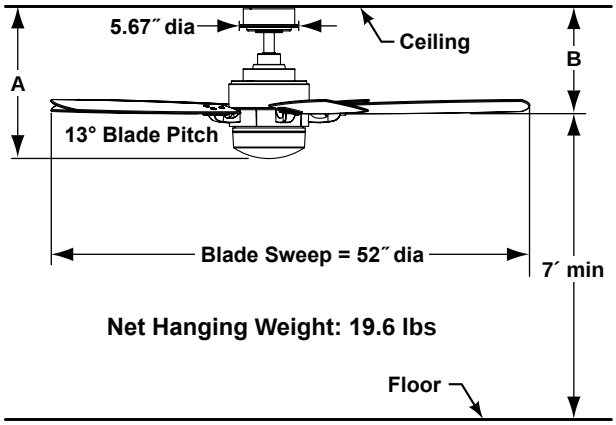

	A	B
Fan w/4.5″ downrod	16.50″	11.42″
Fan w/12″ downrod	24.00″	18.92″
Fan w/18″ downrod	30.00″	24.92″
Fan w/24″ downrod	36.00″	30.92″
Fan w/36″ downrod	48.00″	42.92″
Fan w/48″ downrod	60.00″	54.92″
Fan w/60″ downrod	72.00″	66.92″
Fan w/72″ downrod	84.00″	78.92″

Available Finishes	
OB	Oil-Rubbed Bronze with Opal Frosted Glass
PN	Polished Nickel with Opal Frosted Glass
SN	Satin Nickel with Opal Frosted Glass

INSTALLATION REQUIREMENTS:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:
Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:
172 x 20 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	157	4774	80	0.50	60
Med	95	2775	111	0.39	25
Low	60	1587	139	0.29	11

BLADE SETS:
A set of five 21.5″ reversible wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Polished Nickel and Satin Nickel fans.

CONTROL OPTIONS:
TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote controls are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:
One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:
Fan comes with a 1″ Dia. x 4.5″ downrod. Optional downrods are available in 12″, 18″, 24″, 36″, 48″, 60″, and 72″. For installations requiring a longer downrod, a downrod coupler is available. The Benito™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5″ downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:
Fan is rated for dry locations only.